

## Technical Features



Standard:  
Cover RAL 9016  
Casing RAL 9006



Other  
colours on  
request



Maximum range  
**2,8 m**



Airflow / Length  
**1450 - 3200 m³/h**  
**1 m to 2 m**



Fan  
**Tangential**  
**2-speed**



Heating type  
**A : unheated**  
**E : electrical 3 stages**  
**P : water**



Heating capacity  
**E : 1,9 - 11,3 kW**  
**P : 8,3 - 17,1 kW**



Control  
**Plug&Play Advanced PRO**  
**+ IR remote control**  
**(Optional Clever Pro Control)**



Casing  
**Galvanised steel**



Inlet grille  
**Hexagonal perforated**



Outlet lamellas  
**Aluminium, airfoil type**

TOP is an innovative concept of a decorative recessed air curtain for fully visible installation. It is designed to be integrated into modern premises with contemporary architecture or industrial style. The decorative integral cover is available in different colours to blend in with the surrounding decoration. The front panel is ideal for customising with logos, lighting, lettering or signage, according to the customer's requirements. It incorporates tangential fans with low noise twisted profile turbine 2-speed external rotor motor. Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m RJ11 cable and remote control. Optional: intelligent Clever PRO Control (automatic, programmable, modbus for PLC, timer, etc).

### ✱ UNHEATED

| Model      | Airflow<br>m³/h | Ventilation power<br>230V~50Hz<br>W | Ventilation current<br>230V~50Hz<br>A | Noise level<br>(5 m)<br>dB(A) | Weight<br>kg |
|------------|-----------------|-------------------------------------|---------------------------------------|-------------------------------|--------------|
| TOP 1000 A | 1700            | 80                                  | 0,41                                  | 35/50                         | 23           |
| TOP 1500 A | 2200            | 117                                 | 0,53                                  | 36/51                         | 33           |
| TOP 2000 A | 3200            | 160                                 | 0,82                                  | 38/53                         | 43,5         |

### ⚡ ELECTRICAL HEATED

| Model           | Airflow<br>m³/h | Electrical heating capacity (**)<br>kW | Power supply | Ventilation power<br>230V~50Hz<br>W | Ventilation current<br>230V~50Hz<br>A | Noise level<br>(5 m)<br>dB(A) | Weight<br>kg |
|-----------------|-----------------|----------------------------------------|--------------|-------------------------------------|---------------------------------------|-------------------------------|--------------|
| TOP 1000 E      | 1700            | 1,9/3,8/5,6                            | 400Vx3       | 80                                  | 0,41                                  | 35/50                         | 25           |
| TOP 1000 E-9    | 1700            | 3/6/9                                  | 400Vx3       | 80                                  | 0,41                                  | 35/50                         | 26           |
| TOP 1000 E230   | 1700            | 1,9/3,8/5,6                            | 230Vx1       | 80                                  | 0,41                                  | 35/50                         | 25           |
| TOP 1500 E      | 2200            | 3/6/9                                  | 400Vx3       | 117                                 | 0,53                                  | 36/51                         | 36,5         |
| TOP 1500 E230-6 | 2200            | 1,9/3,8/5,6                            | 230Vx1       | 117                                 | 0,53                                  | 36/51                         | 36,5         |
| TOP 1500 E230-9 | 2200            | 3/6/9                                  | 230Vx1 (*)   | 117                                 | 0,53                                  | 36/51                         | 36,5         |
| TOP 2000 E      | 3200            | 3,8/7,5/11,3                           | 400Vx3       | 160                                 | 0,82                                  | 38/53                         | 52,5         |
| TOP 2000 E230   | 3200            | 3,8/7,5/11,3                           | 230Vx1 (*)   | 160                                 | 0,82                                  | 38/53                         | 52,5         |





(\*) 2 separated power supplies. (\*\*) Under request other electrical heating power can be limited.

### 💧 WATER HEATED

| Model        | Airflow<br>m³/h | P86 (80/60°C)                |                           | P64 (60/40°C)                |                           | Ventilation power<br>230V~50Hz<br>W | Ventilation current<br>230V~50Hz<br>A | Noise level<br>(5 m)<br>dB(A) | Weight<br>kg |
|--------------|-----------------|------------------------------|---------------------------|------------------------------|---------------------------|-------------------------------------|---------------------------------------|-------------------------------|--------------|
|              |                 | Water heating capacity<br>kW | Water pressure drop<br>Pa | Water heating capacity<br>kW | Water pressure drop<br>Pa |                                     |                                       |                               |              |
| TOP 1000 P86 | 1450            | 8,3                          | 7360                      | -                            | -                         | 80                                  | 0,41                                  | 37/51                         | 25,5         |
| TOP 1000 P64 | 1400            | -                            | -                         | 6,42                         | 6570                      | 80                                  | 0,41                                  | 37/51                         | 25,5         |
| TOP 1500 P86 | 2175            | 13,0                         | 7480                      | -                            | -                         | 117                                 | 0,53                                  | 38/52                         | 36,5         |
| TOP 1500 P64 | 2100            | -                            | -                         | 9,85                         | 6210                      | 117                                 | 0,53                                  | 38/52                         | 36,5         |
| TOP 2000 P86 | 2850            | 17,1                         | 6810                      | -                            | -                         | 160                                 | 0,82                                  | 40/54                         | 48           |
| TOP 2000 P64 | 2700            | -                            | -                         | 12,83                        | 5560                      | 160                                 | 0,82                                  | 40/54                         | 48           |

Water heated: connection pipes 1/2" female. P86 of 2 rows coil. P64 of 3 rows coil. No model exceeds the 70dB of noise level.

## Dimensions

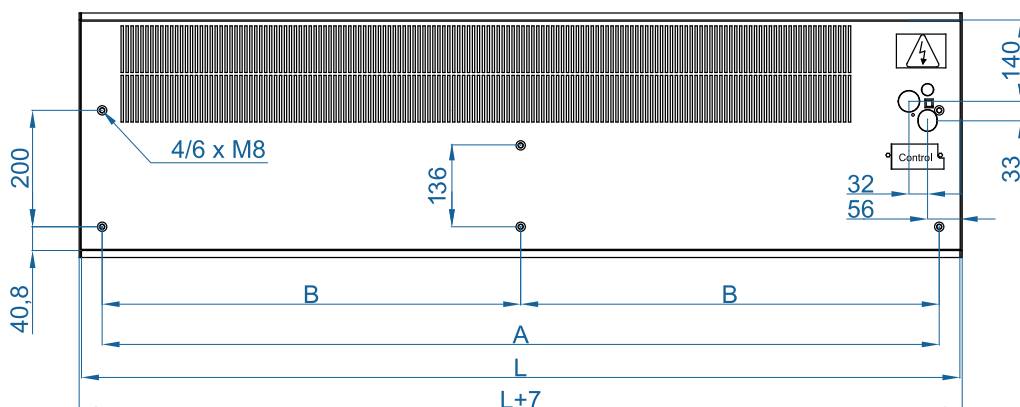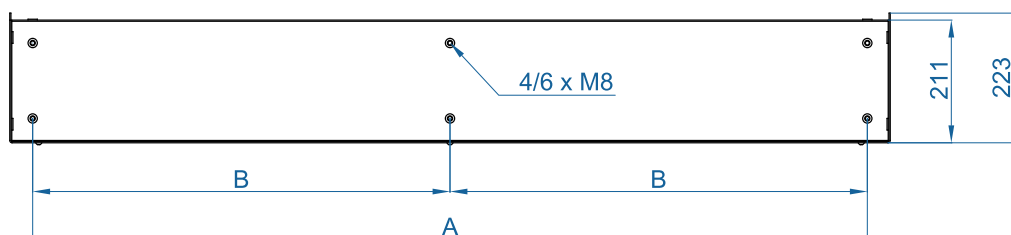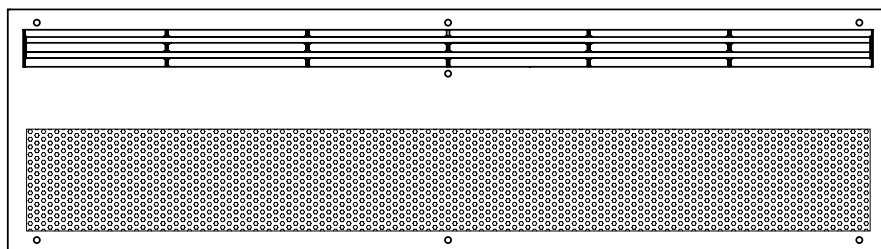

|          | L    | A    | B   |
|----------|------|------|-----|
| TOP 1000 | 1010 | 938  | -   |
| TOP 1500 | 1510 | 1438 | -   |
| TOP 2000 | 2010 | 1938 | 969 |



Selection program

Planos CAD, archivos BIM, manuales de  
instalación y otra documentación





## Finishes

The front panel is designed to include graphics, logos, illuminated signs, signage, clocks or any other decorative element desired by the customer. It is also available in any colour from the RAL chart or in stainless steel.

The decorative integral cover is available in different colours, to blend in with the surrounding decoration.



top

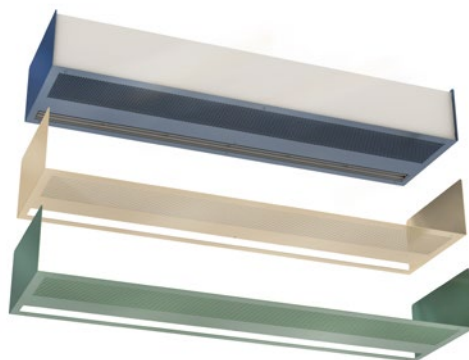

**WATCH VIDEO**

## Optional accessories

### Supports and installation



Wall rail support  
SPWR



Silentblock supports  
SPANG-SIL / SLB



Suspension cables  
SPCT



Wall angle support  
Top

### Control



ADVANCED PRO  
✓ Included



IR Control  
✓ Included



RJ11 Cable  
✓ Included



CLEVER PRO

### Sensors and valves



Magnetic door contact  
DC-MAG  
✓ Included



Mechanical door contact  
DC-MEC



External Temperature  
Sensor



Solenoid valve  
V-S (ON/OFF)



Proportional valve  
V-ACT



Valve 3 ways  
V-T



Anti-freezing sensor  
AFS-INS